

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 March 2001 (15.03.2001)

PCT

(10) International Publication Number
WO 01/17888 A1

(51) International Patent Classification⁷: **B66B 23/12**

(21) International Application Number: **PCT/US00/24408**

(22) International Filing Date:
6 September 2000 (06.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/252446 7 September 1999 (07.09.1999) JP

(71) Applicant (for all designated States except US): **OTIS ELEVATOR COMPANY [US/US]**; Intellectual Property Dept., 10 Farm Springs, Farmington, CT 06032-2568 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TSUKAHARA, Yoshio [JP/JP]**; 13-8, Hiyoshikura, Tomisato-Machi, Imba-Gun, Chiba 286-0202 (JP). **MOTOMURA, Kazuhiko [JP/JP]**; Ho-294-10, Yohkaichiba-Shi, Chiba 289-2100 (JP). **TANAKA, Takashi [JP/JP]**; 13-8, Hiyoshikura, Tomisato-Machi, Imba-Gun, Chiba 286-0202 (JP). **MAEDA, Koichi [JP/JP]**; 3-39-21, Asagayaminami, Suginami-Ku, Tokyo 166-0004 (JP).

(74) Agents: **HENLEY, Randy, G. et al.**; Otis Elevator Company, Intellectual Property Dept., 10 Farm Springs, Farmington, CT 06032-2568 (US).


(81) Designated States (national): DE, KR, US.

Published:

— With international search report.

[Continued on next page]

(54) Title: STEP FOR ESCALATOR

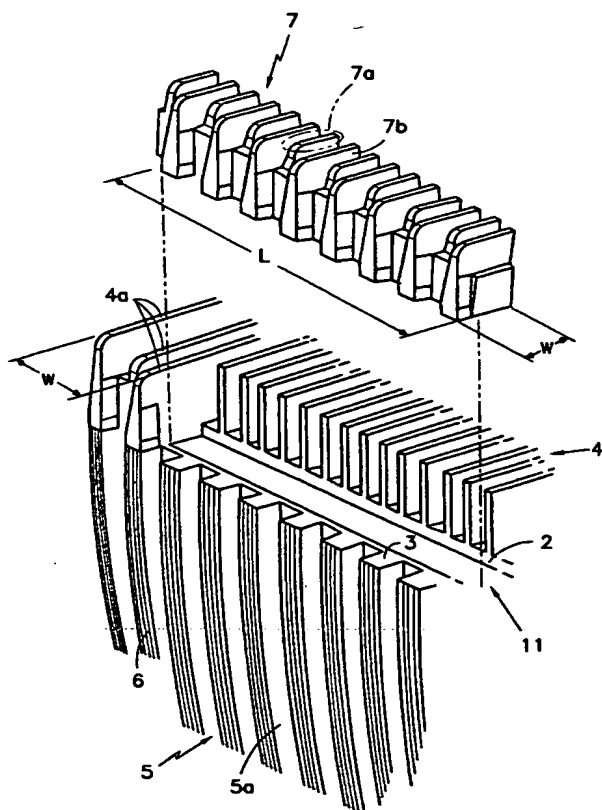

(57) Abstract: An escalator step riser is improved by adding grooves to the cleat surfaces, and, at the same time, a skid-inhibiting function is realized at the rear edge of the step. For escalator step (1), cleats (5a) are formed with a pitch twice that of tread (4) on riser (3). On each cleat (5a) of the riser (3), one or more grooves (6) are formed in the longitudinal direction. In addition, skid-inhibiting surface (7), made of a synthetic resin and having a prescribed width, is attached in a quick connecting/disconnecting manner on the rear edge of step (2). A serrated irregular portion (7c) is formed on the upper surface of cleats (7a), (7b) of the non-slip surface (7).

WO 01/17888 A1